



INDUSTRIAL BATTERY - VRLA-AGM BATTERY - MEDIUM AND LARGE SERIES

MODEL: EG200-12

Container Color


■ Black C

■ Grey 3 C



Plane Chart:


Unit:(mm) Terminal type:(T3)

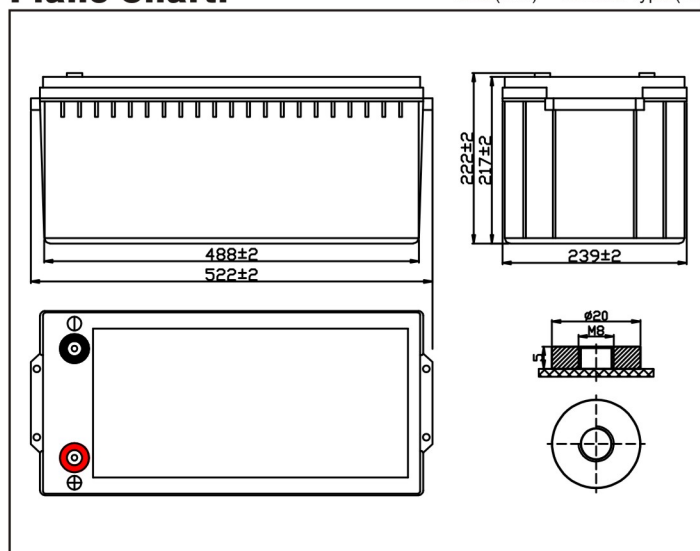


Parameter Chart:

Volts		12V
Capacity(25°C)	10 hours rate (20A)	200Ah
Discharge Current Testing (25°C)	1 hours rate (110A)	110Ah
	3 hours rate (50A)	150Ah
Internal Resistance	Full Charged Battery 25°C	3.4mΩ
Design Life(25°C)	12 years	
Capacity Affected By Temperature	40°C	104%
	25°C	100%
	0°C	83%
	-15°C	65%
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%
	Capacity After 6 Months Storage	82%
	Capacity After 12 Months Storage	65%
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 60A Voltage 14.5~14.9V
	Float (25°C)	Charge Voltage 13.6~13.8V
Weight (Approx)		60.2Kg



Residual Capacity

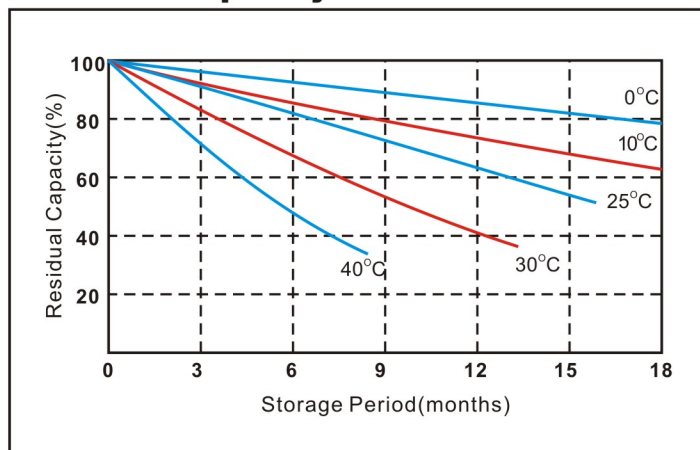

Discharge Current 25°C

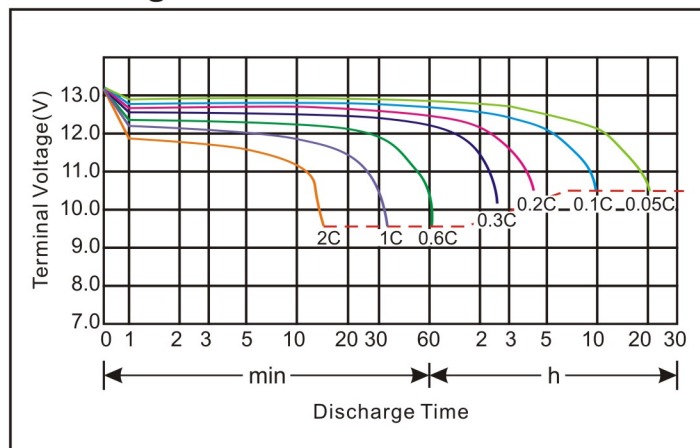

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

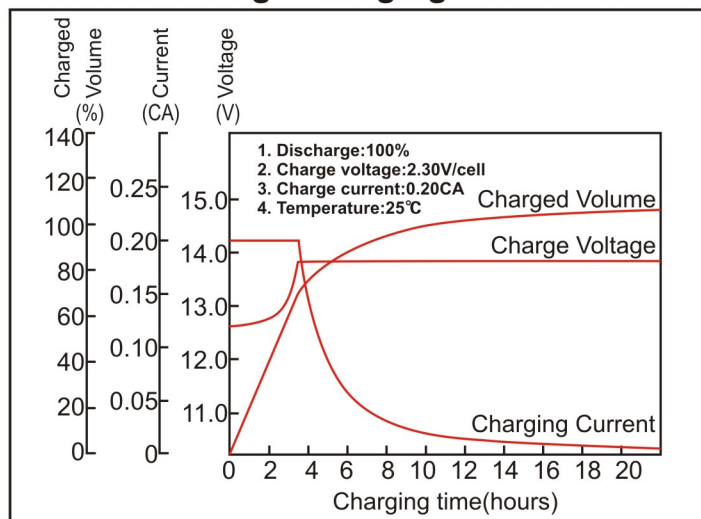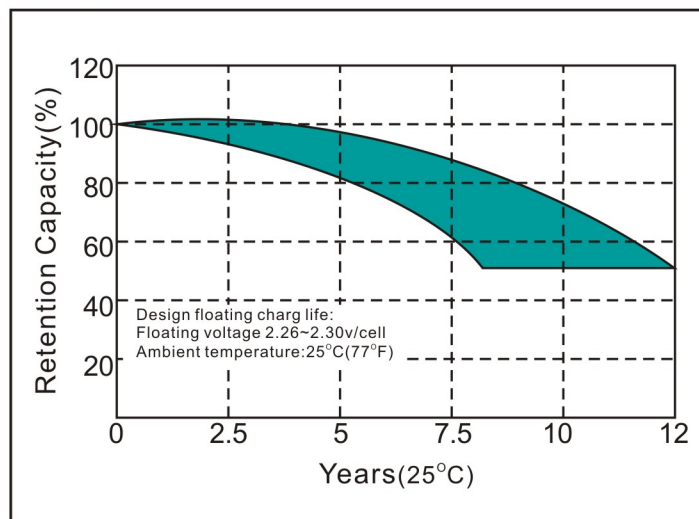**MODEL: EG200-12****Constant voltage charging characteristics****Float Life****Constant Current Discharge Characteristics(A,25°C)**

F.V/Time	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	366.3	207.9	128.7	72.4	54.5	41.4	37.8	24.1	20.2	10.3
10.2V	351.5	200.0	123.8	71.3	53.0	40.9	36.6	23.9	20.1	10.2
10.5V	344.5	195.0	120.8	70.7	52.6	40.6	36.3	23.8	20.0	10.1
10.8V	333.6	190.1	117.8	69.8	51.9	39.4	35.9	23.5	20.0	10.1

Constant Power Discharge Characteristice(Watt,25°C)

F.V/Time	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	4022.4	2332.4	1467.2	837.5	632.6	487.1	439.6	285.1	239.6	122.8
10.2V	3861.0	2239.4	1410.8	824.7	622.7	481.1	432.6	283.1	238.5	121.8
10.5V	3782.8	2187.9	1376.1	817.7	617.8	477.2	428.7	282.2	237.6	120.8
10.8V	3668.0	2127.5	1338.5	807.8	610.8	463.3	424.7	278.2	236.8	120.2

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.